



— OUTDOOR DUAL SIDED KIOSK —

L800P

## KEY FEATURES

- **AUTOMATIC BRIGHTNESS CONTROL**  
light sensor automatic adjustment


- **TWO SPEAKERS 8Ω10W ON THE SIDE**

- **DOUBLE SECURITY LOCKS**

- **AUTOMATIC TEMPERATURE CONTROL**  
intelligent fans cooling system with inlet and outlet

- **HIGH BRIGHTNESS PANEL**  
industrial grade ultra high brightness panels  
2,500cd/ m<sup>2</sup> -3,000cd/ m<sup>2</sup>

- **ANTI-REFLECTIVE GLASS**  
AR glass with high transmission and low reflection,  
UV and IR defense.

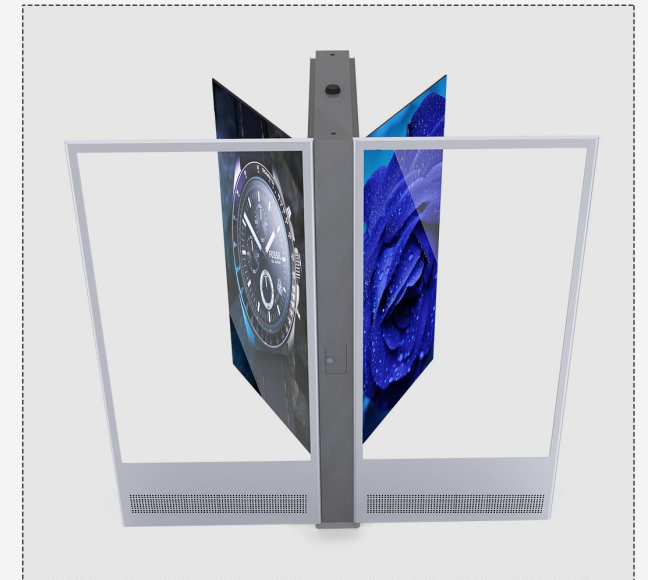

- **Front and rear doors open for easy maintenance**


### 1. DIRECT SUNLIGHT READBLE



3000cd/m<sub>2</sub>


Industrial grade ultra high brightness panels 2,500cd/ m<sup>2</sup> -3,000cd/ m<sup>2</sup> can be easily readable in bright weather conditions.

### 2.ANTI REFLECTIVE GLASS

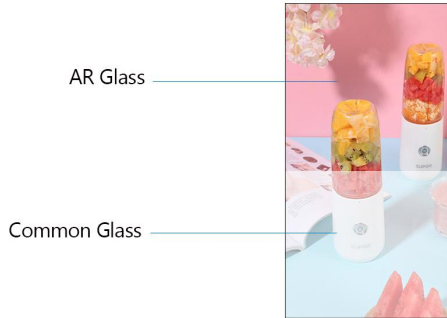



AR glass with high transmission and low reflection. Almost 100% of UV is blocked and IR transmission significantly reduced.

### 3.AMBIENT LIGHT SENSOR

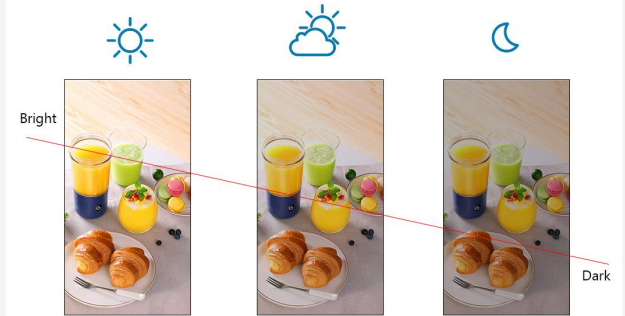

Light sensor change the screen' s brightness depending on the ambient light ensuring the most suitable brightness at any time of the day.

### 4. TEMPERATURE CONTROL SYSTEM



Air cooling system allow the display to work in environment -20°~40°, Air conditioning allow the display to work in any climate -30°~50°.

### 5.VANDAL-PROOF



6mm toughened glass



The enclosure is made from steel sheet and toughened safety glass. All controls and inputs are hidden and not accessible to passers-by to avoid tampering.

### 6 .IP65 RATED ENCLOSURE

IP65

- dust resistance
- 6** protected against dust that may harm equipment.
- water resistance
- 5** protected against water spray from all directions

The display with IP65 rating is able to withstand all wet weather conditions and keep out airborne dust.


## 7. INTEGRATED SPEAKERS



10w 8Ω ×2  
Integrated speakers


Integrated with two stereo speakers for audio element requirement.

## 8. FREE SCHEDULING SOFTWARE

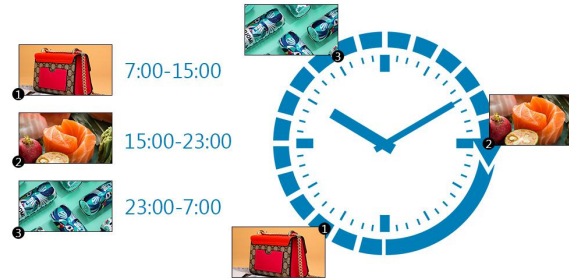

Playlist can be scheduled for displaying different content at different times of the day.

## 9. POWER TIMER




The screen can be set to automatic daily or weekly timing switches on and off.

## 10. 24/7 USAGE




The industrial grade panels are able to be in constant use 24/7 for over 60,000 hours.

## 11. ANDROID OR WINDOWS OS

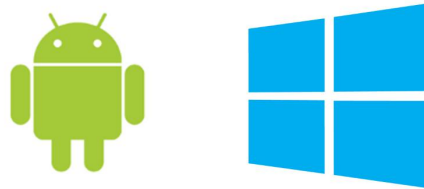

Built-in Android 7.1 operating system and Windows 10 operating system options. You can also use your media player if required.

## 12. NETWORK REMOTE CONTROL


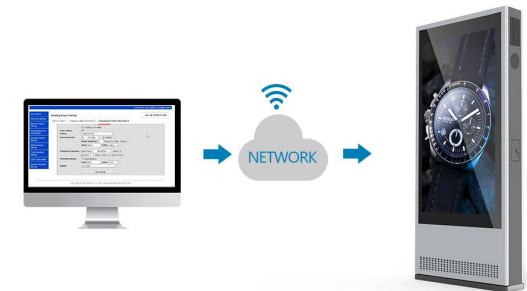


LAN, Wi-Fi, 4G network connection are available. The playlist can be remotely updated over the internet.


## WATERPROOF TESTING

**WATERPROOF TEST:**

Time: at least 3 minutes for each outdoor display in laboratory  
Aim: to prove that according to IPX5 requirement, no water into outdoor display under multi-angle water spray.

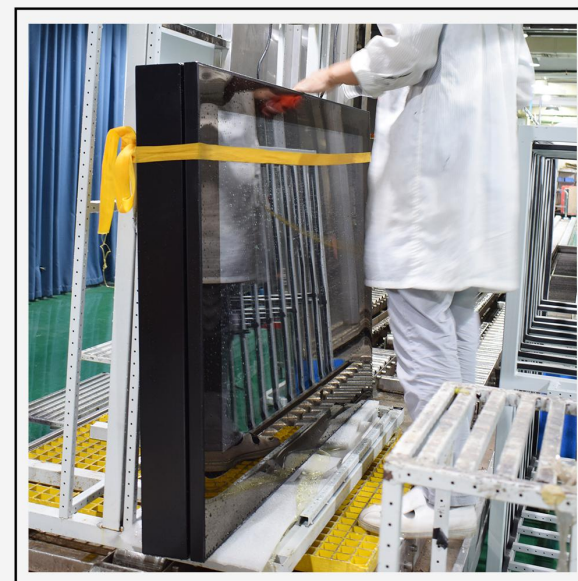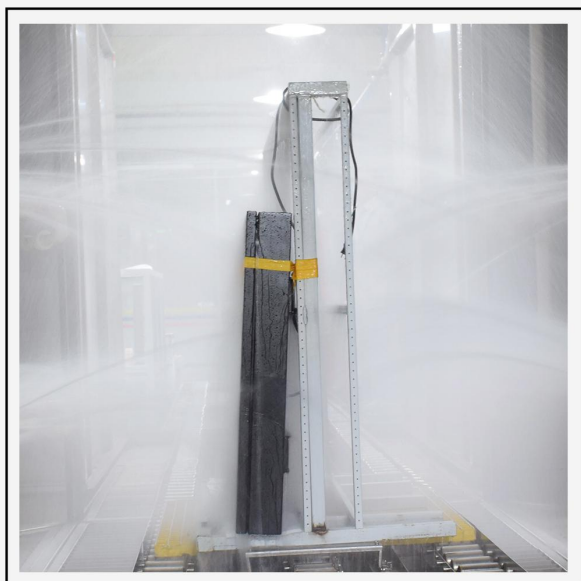

## UV TESTING

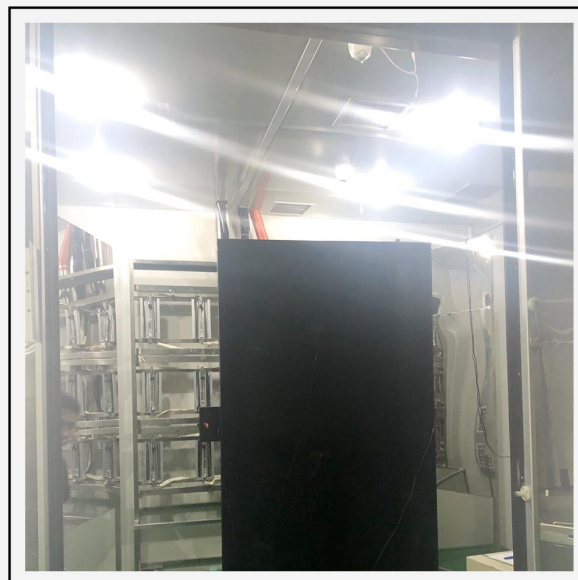


# OUTDOOR DUAL SIDED KIOSK

ITEM	DETAILS	TECHNICAL PARAMETERS		
Hardware data	Size	55inch	65inch	75inch
	Display area (mm)	1209.6x680.4	1428.48x803.52	1650*928
	Referent dimension(H*W*T mm)	2100*890*220	2200*1060*220	2300*1140*220
	Resolution	1920x1080	1920x1080	1920x1080
	Brightness	3000 cd/m <sup>2</sup>	3000 cd/m <sup>2</sup>	3000 cd/m <sup>2</sup>
	Viewing angle	178° (H) / 178° (V)	178° (H) / 178° (V)	178° (H) / 178° (V)
	Contrast ratio	4000:1	4000:1	4000:1
	Dust poof&Water proof	IP55/IP65	IP55/IP65	IP55/IP65
	Brightness Control	Light sensor	Light sensor	Light sensor
	Temperature Control System	Air cooling system / Air conditioning	Air cooling system / Air conditioning	Air cooling system / Air conditioning
Power supply	Switch power	110/240VAC@ 50/60Hz	110/240VAC@ 50/60Hz	110/240VAC@ 50/60Hz
Power consumption	Max Power consumption	940W with fans (2.4KW with air conditioner)	1.1KW with fans (2.6KW with air conditioner)	1.3KW with fans (2.8KW with air conditioner)

ITEM	DETAILS	TECHNICAL PARAMETERS
Android version	Motherboard	RK3288/ RK 3399
	CPU	Cores:4; Basic frequency:1.8 GHz ,Cortex A17 / Dual Cortex-A72 big core+quad Cortex-A53 small core 64-bit CPU
	Operating System	Android 5.1/ 7.1
	Graphics	Integrated GPU ARM Mali-T764 / Quad core Arm mali-T860Mp4
	Memory	4G
	Storage	32G
	RJ45 LAN interface	100M/1000M
	USB	4 USB 2.0 / 2 USB 3.0
	Player Software	content management system
	Audio support	Intergrated
Output interface	HDMI *1	
Windows version	Motherboard	H110
	CPU	Intel i5 6th / i7 6th
	Operating System	Windows 10
	Graphics	Intel HD Graphics
	Memory	4G RAM / 8G RAM
	Storage	120G SSD / 256G SSD
	RJ45 LAN interface	100M/1000M
	USB	USB*1, SD card*1
	Audio support	Intergrated
	Output interface	HDMI*1, VGA*1

ITEM	DETAILS	TECHNICAL PARAMETERS
Standalone version	Motherboard	SX-260
	CPU	HD video decoding chip
	Operating System	uCOS
	Memory	DDR 128MB
	Storage	NAND Flash 16G
	Video format	MPEG1, MPEG2, MPEG4, H264, WMV
	USB	USB*1, SD card*1
Driver board version	Input interface	HDMI*1,USB*1
	USB	none
	Audio support	PC audio, earphone input
Application Environment	input interface	HDMI*1,VGA*1,DVI*1 / HDMI*1,DVI*1,VGA*1,DP*1
	Operating temperature	'-20°C ~ +40°C with fans , -30°C ~ +50°C with air conditioner
	Storage temperature	'-20°C ~ +60°C
Options	Humidity	10-80% RH Non-condensing
	WiFi access point	Yes
	Cellular router	3G or 4G
	Touchscreen	capacitive touch
	LED backlit company logo	Yes

SIZE REFERENCE: 75INCH

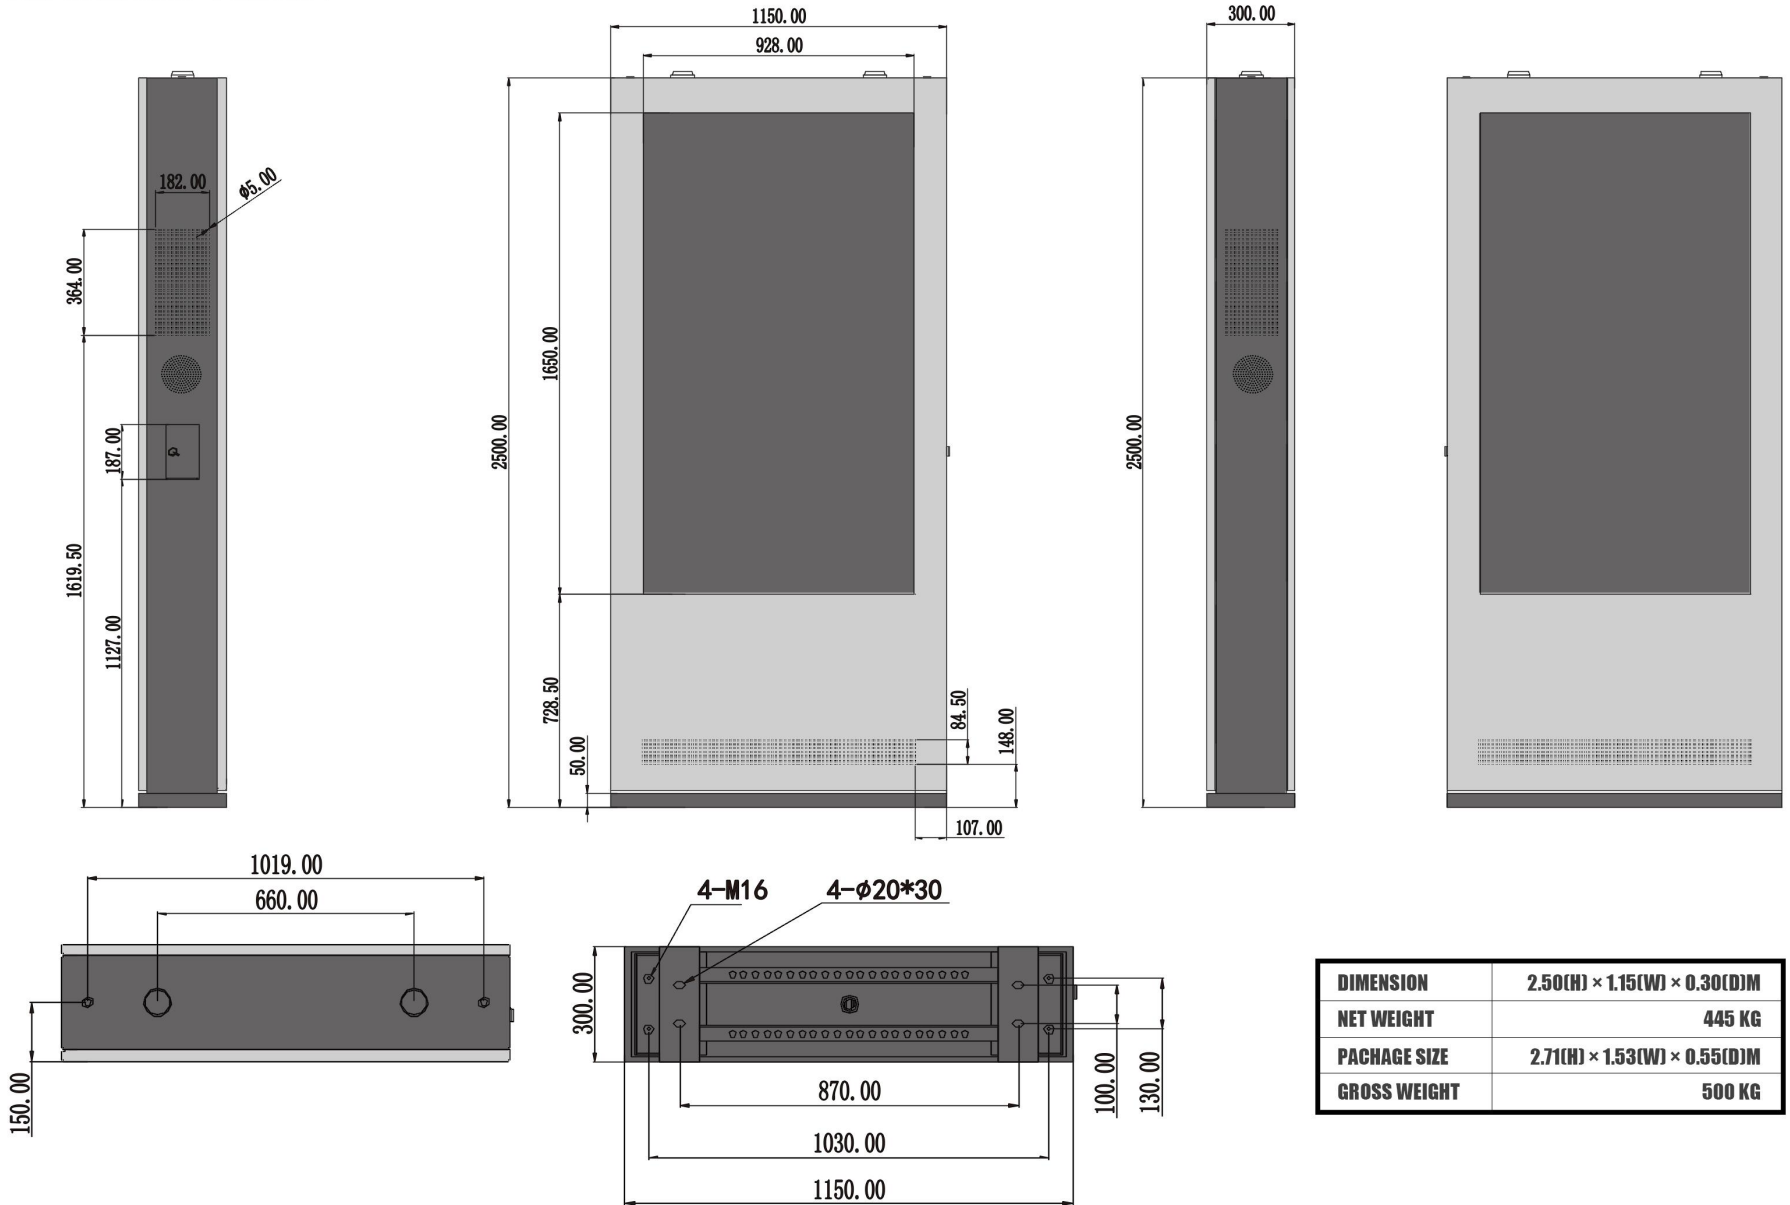

<b>DIMENSION</b>	<b>2.50(H) × 1.15(W) × 0.30(D)M</b>
<b>NET WEIGHT</b>	<b>445 KG</b>
<b>PACKAGE SIZE</b>	<b>2.71(H) × 1.53(W) × 0.55(D)M</b>
<b>GROSS WEIGHT</b>	<b>500 KG</b>




# OTHER DESIGN OPTIONS



ST500



F110P

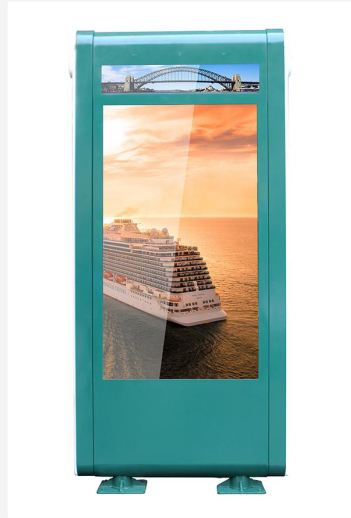

ST600



R600P




D700P



L800P




JP120L

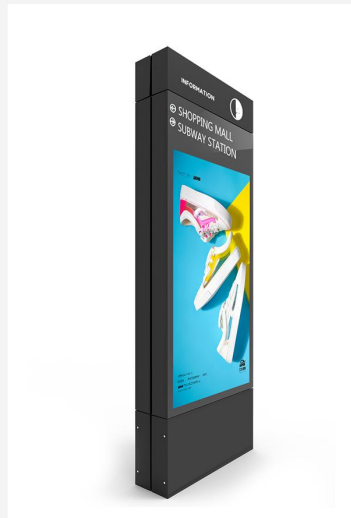

UO200P



F130P

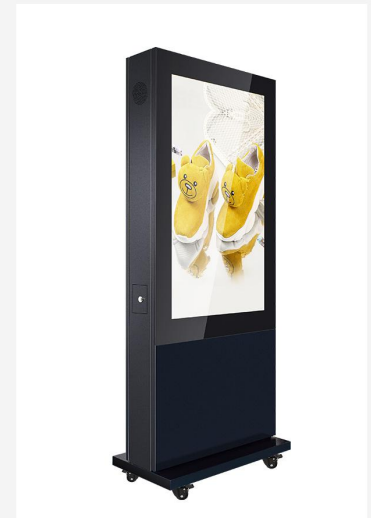

JP120P



GLOBAL  
7X24 SERVICE



REMOTE TECHNICAL  
SUPPORT



SUPPORT CUSTOMER'S  
IMPORTANT ACTIVITIES




FREE TECHNICAL  
TRAINING



VISIT VIP COUSTOMERS  
REGULARLY



1 YEARS WARRANTY

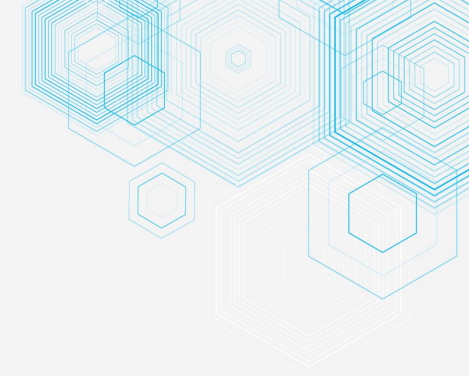

YOU ARE NOT ONLY A CLIENT,  
YOU ARE OUR **PARTNER**



**SHENZHEN UNIVIEW LED CO.,LTD**

- ☎ 86-755-2100-9715
- ✉ [lcdsales@univiewlcd.com](mailto:lcdsales@univiewlcd.com)
- 📍 Bldg.A, Meicheng Industrial Park, Langjing Road, Dalang St., Longhua District, Shenzhen.

**UNIVIEW EUROPE B.V.**

- ☎ +31 402026113
- 📍 Verdunplein 9 5627 SZ Eindhoven, the Netherlands.