



UNIVIEW COMMERCIAL DISPLAY

YOU ARE NOT ONLY A CLIENT,
YOU ARE OUR **PARTNER**



DIGITAL SIGNAGE



SHENZHEN UNIVIEW LED CO., LTD

- +86 755-2100 9715
- lcdsales@univiewlcd.com
- Add: Bldg A-C, Meicheng Industrial Park, Langjing Road, Dalang Community, Longhua New District, Shenzhen P.R. China

UNIVIEW EUROPE B.V.

- +31 402026113
- Verdunplein 9 5627 SZ Eindhoven, the Netherland.

2020
www.univiewlcd.com



■ Shenzhen Uniview LED Co., Ltd

📍 Add:
Bldg A-C, Meicheng Industrial Park, Langjing Road,
Dalang Community, Longhua New District,
Shenzhen P.R. China



☎ Tel: +86 0755 21009715 📠 Fax: +86 755 29353590
✉ Email: lcdsales@univiewlcd.com 🌐 Web: www.univiewlcd.com

■ Uniview Europe B.V.

📍 Add:
Verdunplein 9 5627 SZ Eindhoven, The Netherlands

☎ Tel: 0031 402026113
✉ Email: lcdsales@univiewlcd.com

UNIVIEW MILESTONE

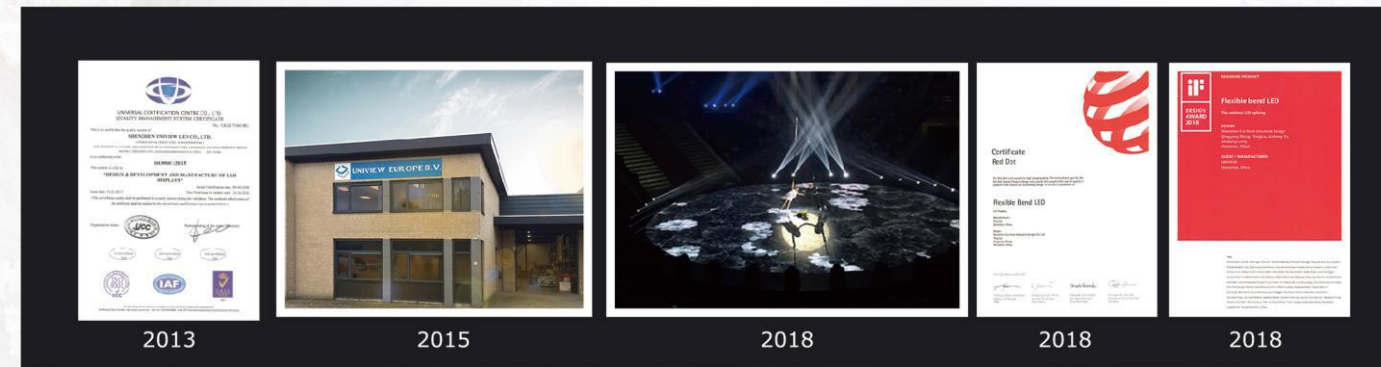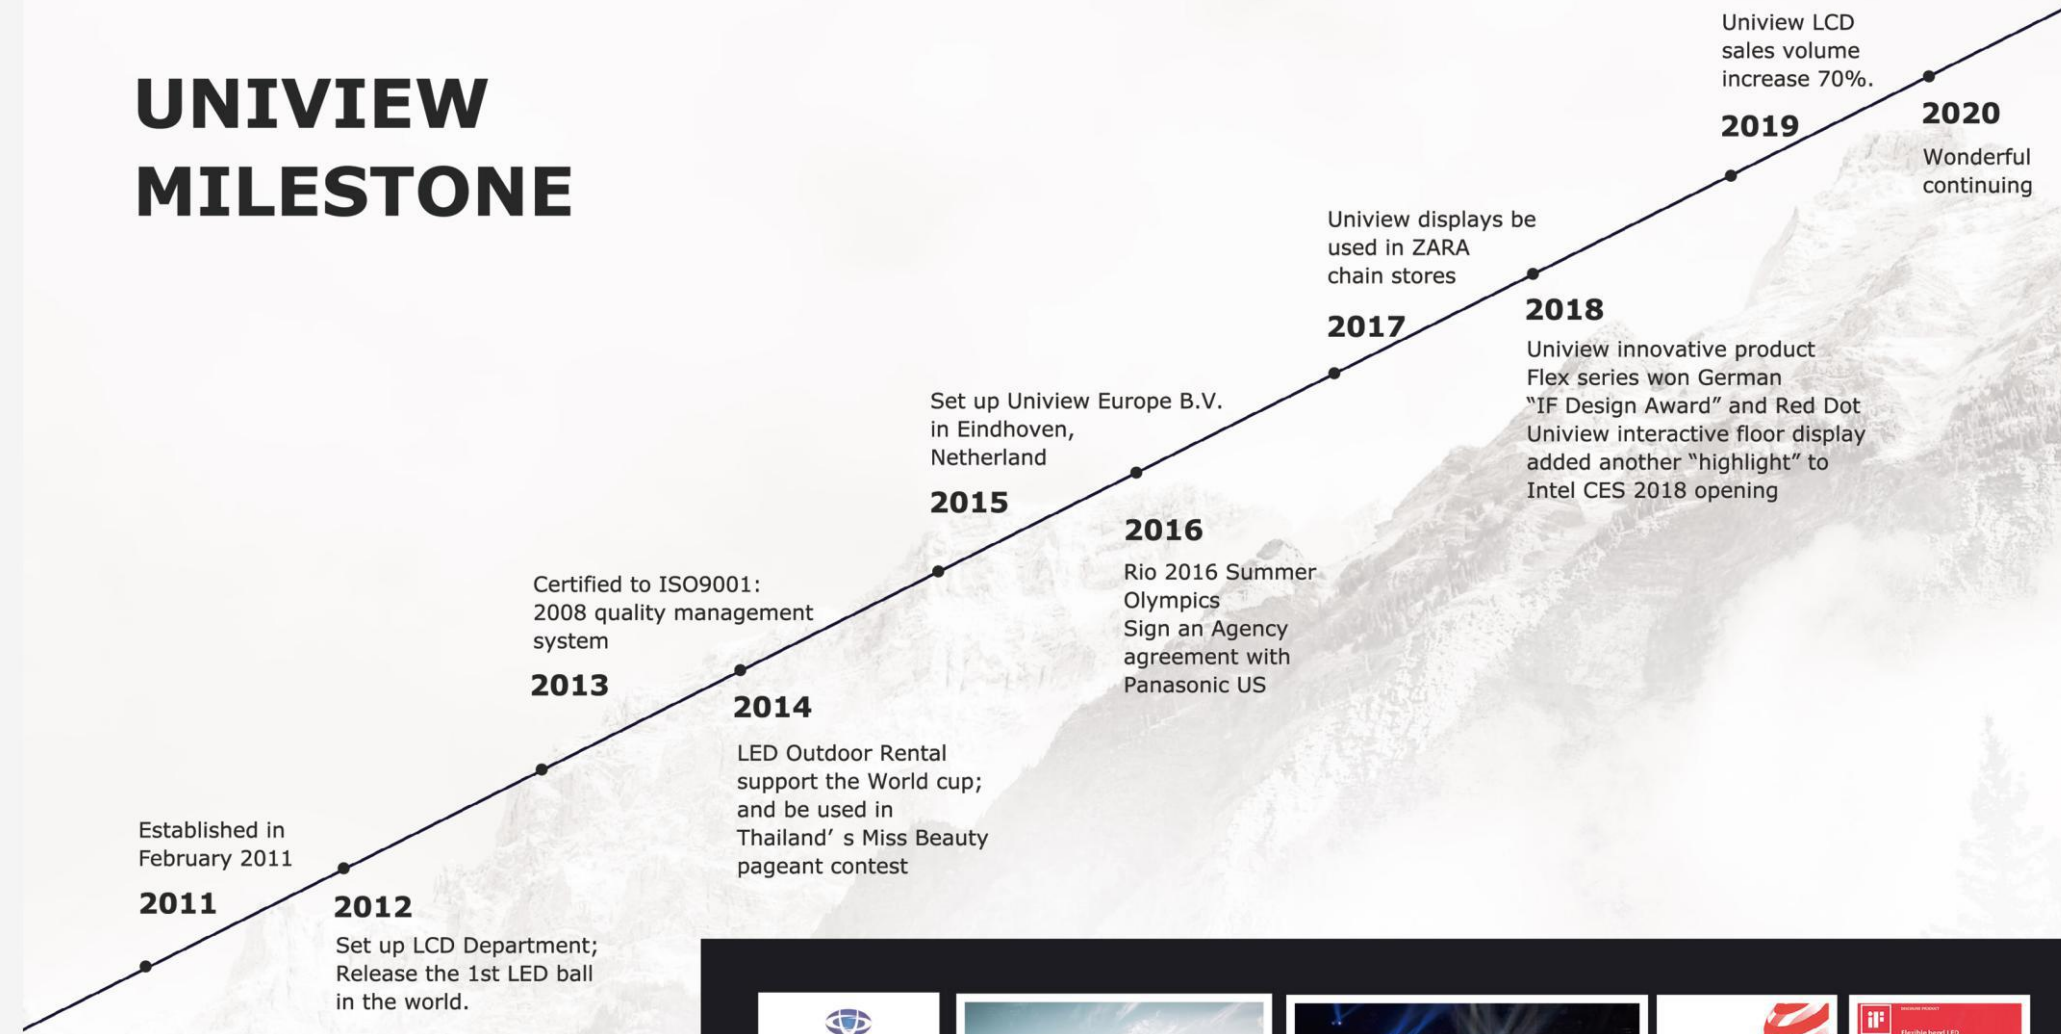








2013

2015

2018




2018

2018

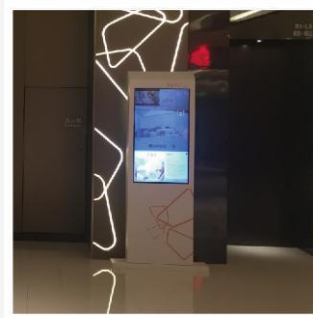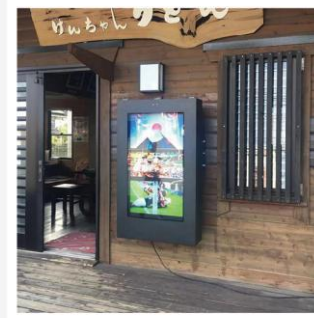

APPLICATION & CASE

Uniview products are widely used in Hospitality, Food&Drink, Retail, Shopping Mall, Transportation, Education, Rental and other applications.





OUTDOOR FLOOR STAND KIOSK

FEATURES

- IP55/IP65
- Automatic brightness control
- Automatic temperature control
- Security lock
- Additional monitoring devices is available
- Customized logo options

COLOR IS OPTIONAL ■■■■■■



F130P

→ AR glass



UO200P



OUTDOOR WALL MOUNTED DISPLAY

FEATURES

- IP55/IP65
- Automatic brightness control
- Automatic temperature control
- Support front maintenance
- Ultra thin design-10cm only
- Support landscape and portrait screen mode

COLOR IS OPTIONAL ■■■■■■



AR glass ←

Full glass design in front ←



V130L

13cm



10CM

WO200P

PANEL

Panel Brand	LG/SAMSUNG
Panel Size	43"/49"/55"/65"/75"/86"/98"
Resolution	1080*1920/2160*3840
Brightness(nits)	2000-3000
Operating Life (hours)	50000-60000h

MEDIA CONNECTIVITY

Operating System	Interface	Storage
Driver board version	HDMI, VGA, DVI	None
Standalone version	HDMI, USB	16G
Android version	HDMI, USB	2G+16G/4G+16G
Windows version	HDMI, VGA, USB	4G+120G SSD

ENVIROMENT

Operating Enviroment	Outdoor
Operating temperature	-20°C ~ +40°C with fans , -30°C ~ +50°C with air conditioner
Storage temperature	-20°C ~ +60°C
Humidity	10%-80% RH Non-condensing

TOUCH

Touch Type	Capacitive Touch
Number of Touch points	10/40
Interface	USB

OPTIONAL ITEM

wifi access point	Yes	Camera	Yes
Wheels	Yes	Printer	Yes
Scanner	Yes	Card Reader	Yes

ENCLOSURE

Dust proof& Water proof	IP55/IP65
Glass Type	Laminated tempered and anti-reflective glass

PANEL

Panel Brand	LG/SAMSUNG
Panel Size	32"/43"/49"/55"/65"/75"/86"
Resolution	1920*1080/3840*2160
Brightness(nits)	2000-3000
Operating Life (hours)	50000-60000h

MEDIA CONNECTIVITY

Operating System	Interface	Storage
Driver board version	HDMI, VGA, DVI	None
Standalone version	HDMI, USB	16G
Android version	HDMI, USB	2G+16G/4G+16G
Windows version	HDMI, VGA, USB	4G+120G SSD

ENVIROMENT

Operating Enviroment	Outdoor
Operating temperature	-20°C ~ +40°C with fans , -30°C ~ +50°C with air conditioner
Storage temperature	-20°C ~ +60°C
Humidity	10%-80% RH Non-condensing

TOUCH

Touch Type	Capacitive Touch
Number of Touch points	10/40
Interface	USB

OPTIONAL ITEM

wifi access point	Yes
Touch Screen	Yes

ENCLOSURE

Dust proof& Water proof	IP55/IP65
Glass Type	Laminated tempered and anti-reflective glass



OUTDOOR DUAL SIDED KIOSK

COLOR IS OPTIONAL

AR glass
Full glass design

Hanging Loop

Full glass design

D700P

R600P

Security Lock

AR glass

LCD display

L800P

Light box

FEATURES

- IP55/IP65
- Automatic brightness control
- Automatic temperature control
- Support open door maintenance
- Two sides can be both LCD display, or one side LCD display and another side light box

PANEL

Panel Brand	LG/SAMSUNG
Panel Size	43"/49"/55"/65"/75"/86"/98"
Resolution	1080*1920/2160*3840
Brightness(nits)	2000-3000
Operating Life (hours)	50000-60000h

TOUCH

Touch Type	Capacitive Touch
Number of Touch points	10/40
Interface	USB

MEDIA CONNECTIVITY

Operating System	Interface	Storage
Driver board version	HDMI, VGA, DVI	None
Standalone version	HDMI, USB	16G
Android version	HDMI, USB	2G+16G/4G+16G
Windows version	HDMI, VGA, USB	4G+120G SSD

OPTIONAL ITEM

wifi access point	Yes
Touch Screen	Yes

ENVIROMENT

Operating Enviroment	Outdoor
Operating temperature	-20°C ~ +40°C with fans, -30°C ~ +50°C with air conditioner
Storage temperature	-20°C ~ +60°C
Humidity	10%-80% RH Non-condensing

ENCLOSURE

Dust proof& Water proof	IP55/IP65
Glass Type	Laminated tempered and anti-reflective glass



Control keys



Speaker

UW1500P



UW1500L

SEMI-OUTDOOR WINDOW DISPLAY

COLOR IS OPTIONAL



U1500P

FEATURES

- Shop window application solution
- Flexible installation wall mounted, floor standing or hanging
- Support landscape and portrait screen mode
- High brightness screen options 1500nits - 3000nits
- Excellent performance for heat dissipation
- Super narrow frame design

PANEL

Panel Brand	LG/SAMSUNG
Panel Size	32"/43"/49"/55"
Resolution	1080*1920/2160*3840
Brightness(nits)	1500/3000
Operating Life (hours)	50000-60000h

MEDIA CONNECTIVITY

Operating System	Interface	Storage
Driver board version	HDMI, VGA, DVI	None
Standalone version	HDMI, USB	16G
Android version	HDMI, USB	2G+16G /4G+16G
Windows version	HDMI, VGA, USB	4G+120G SSD

ENVIROMENT

Operating Enviroment	Semi-outdoor
Operating temperature	0°C ~ +40°C
Storage temperature	-10°C ~ +60°C
Humidity	10%-80% RH Non-condensing

INSTALLATION

- Hanging Floor standing Wall mounted

OPTIONAL ITEM

- wifi access point Yes



INDOOR TOTEM CLASSIC


COLOR IS OPTIONAL ■ ■ ■ ■ ■




IS1900



UT1900

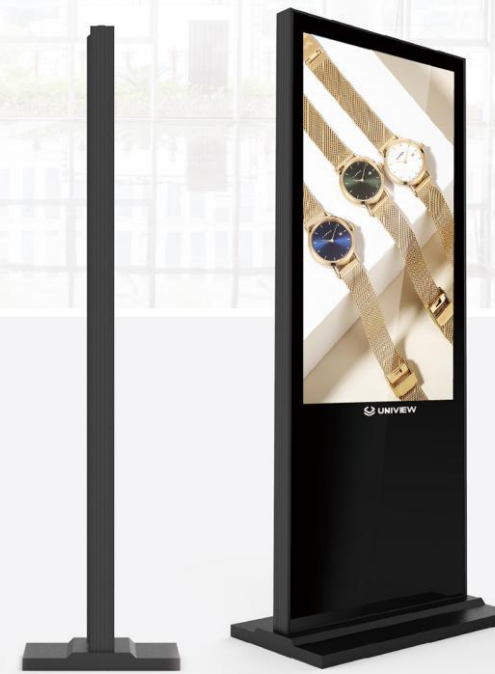

AL1900

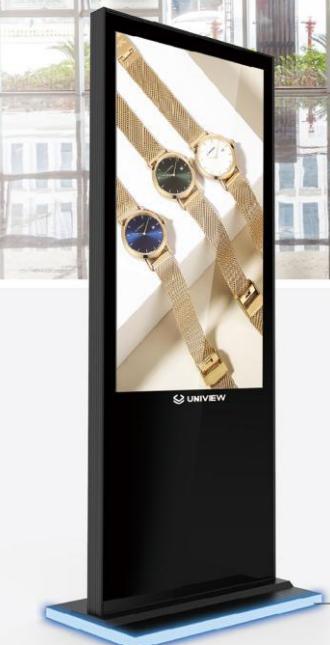

Light bar

FEATURES

- Reinforced aluminum profile
- Side strip design
- Inlaid reinforced base
- Light bar options
- Common structure for multiple operating systems

PANEL

Panel Brand	LG/SAMSUNG
Panel Size	43"/49"/55"/65"
Resolution	1080*1920/2160*3840
Brightness(nits)	350/700/1000
Operating Life (hours)	50000-60000h

MEDIA CONNECTIVITY

Operating System	Interface	Storage
Driver board version	HDMI, VGA, DVI	None
Standalone version	HDMI, USB	16G
Android version	HDMI, USB	2G+16G/4G+16G
Windows version	HDMI, VGA, USB	4G+120G SSD

TOUCH

Touch Type	Capacitive Touch/Infrared Touch
Number of Touch points	10/40
Interface	USB

ENVIROMENT

Operating Enviroment	Indoor
Operating temperature	0°C ~ +40°C
Storage temperature	-10°C ~ +60°C
Humidity	10%-80% RH Non-condensing

OPTIONAL ITEM

wifi access point	Yes
Wheels	Yes
Touch Screen	Yes
Camera	Yes
Printer	Yes
Card Reader	Yes
Scanner	Yes



INDOOR INTERACTIVE KIOSK

COLOR IS OPTIONAL



IK110



IK120



IK130



IK140

FEATURES

- Perfect smooth radian
- Reinforced base
- Sensitive multi-touch screen
- High compatible system
- Wayfinding application solution

PANEL

Panel Brand	LG/SAMSUNG
Panel Size	22"/32"/43"/49"/55"
Resolution	1920*1080/3840*2160*
Brightness(nit)	350/700/1000nit
Operating Life (hours)	50000-60000h

MEDIA CONNECTIVITY

Operating System	Interface	Storage
Driver board version	HDMI, VGA, DVI	None
Standalone version	HDMI, USB	16G
Android version	HDMI, USB	2G+16G/4G+16G
Windows version	HDMI, VGA, USB	4G+120G SSD

TOUCH

Touch Type	Capacitive Touch/Infrared Touch
Number of Touch points	10/40
Interface	USB

ENVIROMENT

Operating Enviroment	Indoor
Operating temperature	0°C ~ +40°C
Storage temperature	-10°C ~ +60°C
Humidity	10%-80% RH Non-condensing

OPTIONAL ITEM

wifi access point	Yes	Wheels	Yes
-------------------	-----	--------	-----



INDOOR MAGIC MIRROR DISPLAY

FEATURES

- Silver mirror and gray mirror are available
- Sensitive motion sensor option
- Full screen display when no one is approaching and display area will be automatically zoomed out when someone approaches

COLOR IS OPTIONAL



MI220



MI320



INDOOR BROCHURE HOLDER

FEATURES

- Small and exquisite
- Single column or double column bookshelf design
- Easy operation and transportation

COLOR IS OPTIONAL

Newspaper Holder



BH

PANEL

Panel Brand	LG/SAMSUNG
Panel Size	43"/49"/55"
Resolution	1080*1920/2160*3840
Brightness(nits)	350/700/1000
Operating Life (hours)	50000-60000h

MEDIA CONNECTIVITY

Operating System	Interface	Storage
Driver board version	HDMI, VGA, DVI	None
Standalone version	HDMI, USB	16G
Android version	HDMI, USB	2G+16G /4G+16G
Windows version	HDMI, VGA, USB	4G+120G SSD

ENVIROMENT

Operating Enviroment	Indoor
Operating temperature	0°C ~ +40°C
Storage temperature	-10°C ~ +60°C
Humidity	10%-80% RH Non-condensing

OPTIONAL ITEM

wifi access point	Yes
Camera	Yes

PANEL

Panel Brand	LG/SAMSUNG
Panel Size	22"/27"/32"
Resolution	1080*1920/2160*3840
Brightness(nits)	350/700
Operating Life (hours)	50000-60000h

MEDIA CONNECTIVITY

Operating System	Interface	Storage
Driver board version	HDMI, VGA, DVI	None
Standalone version	HDMI, USB	16G
Android version	HDMI, USB	2G+16G /4G+16G
Windows version	HDMI, VGA, USB	4G+120G SSD

TOUCH

Touch Type	Capacitive Touch/Infrared Touch
Number of Touch points	10/40
Interface	USB

OPTIONAL ITEM

wifi access point	Yes	Camera	Yes
Touch Screen	Yes	Wheels	Yes

ENVIROMENT

Operating Enviroment	Indoor
Operating temperature	0°C ~ +40°C
Storage temperature	-10°C ~ +60°C
Humidity	10%-80% RH Non-condensing



INDOOR STRETCHED SCREEN ///

FEATURES

- A wide range of sizes selection from 11 inch to 88 inch
- Special resolution options and wide screen format options
- Customize content for portrait and landscape screen mode
- Flexible application in shop shelves, digital menu board, airport or station information display



SS100



COLOR IS OPTIONAL ■ ■ ■ ■ ■ ■ ■ ■ ■ ■

PANEL

Panel Brand	LG/SAMSUNG
Panel Size	11"-88"
Resolution	1920*360/1920*540
Brightness(nits)	300/500/700
Operating Life (hours)	50000-60000h

MEDIA CONNECTIVITY

Operating System	Interface	Storage
Driver board version	HDMI, VGA, DVI	None
Standalone version	HDMI, USB	16G
Android version	HDMI, USB	2G+16G/4G+16G
Windows version	HDMI, VGA, USB	4G+120G SSD

ENVIROMENT

Operating Enviroment	Indoor
Operating temperature	0°C ~ +40°C
Storage temperature	-10°C ~ +60°C
Humidity	10%-80% RH Non-condensing

OPTIONAL ITEM

wifi access point	<input checked="" type="checkbox"/> Yes
-------------------	---



VIDEL WALL ///

FEATURES

- Ultra narrow bezel
- Display information as clear, crisp, vivid HD video images
- With the industry' s thinnest bezel and outstanding image quality



UVI

PANEL

Panel Brand	LG/SAMSUNG
Panel Size	46"/49"/55"
Resolution	1920*1080/3840*2160
Brightness(nits)	500/700
Operating Life (hours)	50000-60000h

Installation&Interface

Build-in Interface	HDMI, VGA, DVI,USB
Installation	Wall Mounted, Floor Standing

Bezel option(mm)

3.5mm	1.8mm	0.99mm
-------	-------	--------

Controller

Matrix	Splitter
Graphic processing	

ENVIROMENT

Operating Enviroment	Indoor
Operating temperature	0°C ~ +40°C
Storage temperature	-10°C ~ +60°C
Humidity	10%-80% RH Non-condensing



CUSTOMIZED PROCESS

- 1 RECEIVE CLIENT REQUIREMENT
- 2 R&D TECHNICAL DISCUSSION
- 3 IMPLEMENTATION OF DESIGN SKETCH & TECHNICAL SPECIFICATION, AND GET CUSTOMER'S FEEDBACK
- 4 IMPROVE DESIGN ACCORDING TO CUSTOMER'S FEEDBACK TILL GET CUSTOMER'S APPROVAL
- 5 SAMPLE PRODUCTION
- 6 SAMPLE TEST
- 7 SAMPLE DELIVERY
- 8 IMPROVE DESIGN ACCORDING TO CUSTOMER'S FEEDBACK TILL GET CUSTOMER'S APPROVAL
- 9 SMALL BATCH PRODUCTION
- 10 MASS PRODUCTION

